



## PSB52XL2

Power line Communication Coupling Transformer  
For High-Bit-Rate Applications.

### MECHANICAL DIMENSIONS

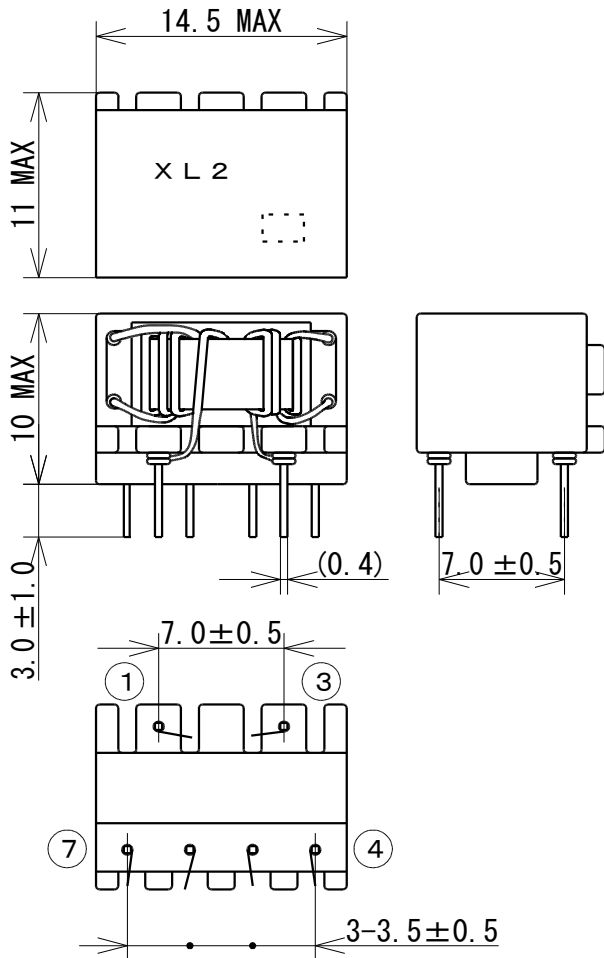

### SCHEMATIC

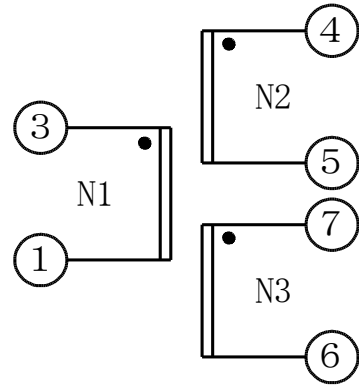

Turns Ratio  
 $N1:N2:N3=1:1:1$

Creepage distance : 5.2mm  
Working Voltage  $V_{rms} = 240V$   
Overvoltage category : III  
Pollution degree : II  
Insulation material group : IIIb

### ※Precautions for use

For transformers that have been manufactured for more than 6 months, please check the solder wettability of the terminals before use.

### ELECTRICAL SPECIFICATIONS

Parameter	Pins Under Test	Test Conditions	STD TOLERANCE
Breakdown Voltage	3 : 7, 6	Vac 3000Vrms 2sec	
Inductance	3 - 1	10kHz 0.1V	$\geq 12.0\mu H$
Leakage Inductance	3 - 1 (4-5 SHORT)	1MHz 0.1V	$\leq 0.2\mu H$
DC RESISTANCE	3 - 1	T = 25°C	$\leq 0.1 \Omega$